

VERDERAIR

VA-EH50



Description

The VA-EH50 is an electrical driven double diaphragm pump. With the wide range of different available materials for pump body, valve seats, valve balls and diaphragms, this pump is the ideal problem solver in a wide range of applications across many industries. The VA-EH50 can run in “low pulsation mode” to reduce the generated pulsations in the flow or in “transfer mode” to generate a higher flow rate.

Your benefits

- Energy efficient
- EC1935/2004 and FDA certified
- Smoother flow when operating in “low Pulsation Mode”
- Low noise level
- Can stall against close discharge
- Can run dry without damage
- Dry self priming

Technical Data				
Weight +/- (kg)	Drive option	Fluid & air section		
	WG	SA	90	
		SS	128	
	AC5K5	Extra weight on the drive option WG above	+65	
	BC4K0	Extra weight on the drive option WG above	+50	
	CC3K0/ CC2K2	Extra weight on the drive option WG above	+41	
	AX5K5	Extra weight on the drive option WG above	+117	
	BX4K0	Extra weight on the drive option WG above	+61	
	CX2K2	Extra weight on the drive option WG above	+49	
A2xxx, B2xxx, C2xxx	Extra weight on the drive options above	+13		
Max. Suction lift (mwc)		Dry / Wet	5,5	
Temperature (°C)		Internals		
		NW	-18	82
		SP	-40	82
		TF	4	104
Max. Particle size (mm)			6,3	
Air connection			3/8" NPT(f)	
Air consumption (Nm³/h)			< 0,006	
Max. recommended viscosity (mPas)			20.000	

VERDERAIR

VA-EH50



Code VA-EH50 No.1 No.2 No.3 No.4.No.5.No.6.No.7.

No.1 Fluid section

* ⚠ S = Stainless Steel 316, Ra<= 3,2µm

No.2 Center section

A = Aluminium
S = Stainless Steel

No.3 Check valve seats

SE = Stainless Steel 316 with EPDM o-rings
ST = Stainless Steel 316 with PTFE o-rings

No. 4 Check valve balls

NW = Neoprene Weighted
SP = Santoprene
TF = PTFE

No. 5 Diaphragms

SP = Santoprene
TF = PTFE/EPDM 2 piece

No. 6 Connections

D6 = DIN11851, DN65 male
T6 = Tri-clamp (ASME BPE), 2 1/2"

No. 7 Drive options

* ⚠ WG = no gearbox -no drive
AC5K5 = Gearbox with 5,5 kW AC drive (pump speeds : 164, 145 or 130 RPM)

BC4K0 = Gearbox with 4,0 kW AC drive (pump speeds : 105 or 87 RPM)

CC3K0 = Gearbox with 3,0 kW AC drive (pump speeds : 73 RPM)

CC2K2 = Gearbox with 2,2 kW AC drive (pump speeds : 54 RPM)

A25K5 = AC5K5 + integrated 240V compressor in frame

B24K0 = BC4K0 + integrated 240V compressor in frame

C23K0 = C23K0 + integrated 240V compressor in frame

C22K2 = C22K2 + integrated 240V compressor in frame

** ⚠ AX5K5 = Gearbox with 5,5 kW ATEX drive (pump speeds : +/-125 RPM)

** ⚠ BX4K0 = Gearbox with 4,0 kW ATEX drive (pump speeds : +/- 90 RPM)

** ⚠ CX2K2 = Gearbox with 2,2 kW ATEX drive (pump speeds : +/- 54 RPM)

Example pump type

VA-EH50 SA ST TF TF D6 AC5K5

NOTE not all combinations are available

* ⚠ II 2 G Ex h IIB T3 Gb

** ⚠ II 2 Ex h d IIB T3 Gb


VERDERAIR
VA-EH50



Motor and Gearbox Code

Dimensions for pumps with Tri-clamp connections in cm

Ref.	WG	AC	A1. A2	BC	B1. B2	CC	C1. C2	AX	BX	CX	AF	BF	CF
A	55,6	55,6	55,6	55,6	55,6	55,6	55,6	55,6	55,6	55,6	55,6	55,6	55,6
B	61,9	61,9	61,9	61,9	61,9	61,9	61,9	61,9	61,9	61,9	61,9	61,9	61,9
C	66,0	66,0	66,0	66,0	66,0	66,0	66,0	66,0	66,0	66,0	66,0	66,0	66,0
D	-	51,3	51,3	49,3	49,3	48,3	48,3	53,8	51,8	51,8	34,3	35,3	26,4
E	6,4	6,4	6,4	6,4	6,4	6,4	6,4	6,4	6,4	6,4	6,4	6,4	6,4
F	55,9	55,9	55,9	55,9	55,9	55,9	55,9	55,9	55,9	55,9	55,9	55,9	55,9
G	21,1	87,9	87,9	81,8	81,8	77,2	77,2	105,2	88,6	86,1	111,3	95,3	95,0
H	16,0	16,0	16,0	16,0	16,0	16,0	16,0	16,0	16,0	16,0	16,0	16,0	16,0
J	37,1	103,9	103,9	97,8	97,8	93,0	93,0	121,2	104,6	102,1	127,3	111,0	111,0

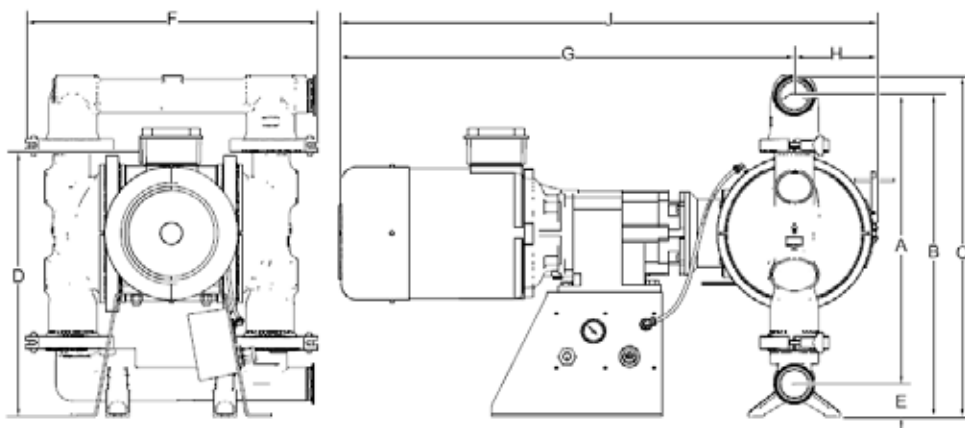


All dimensions are in cm.

All dimensions are for guidance only.

*For dimensions of pumps with DIN connections *
please contact your local supplier.

VERDERAIR

VA-EH50

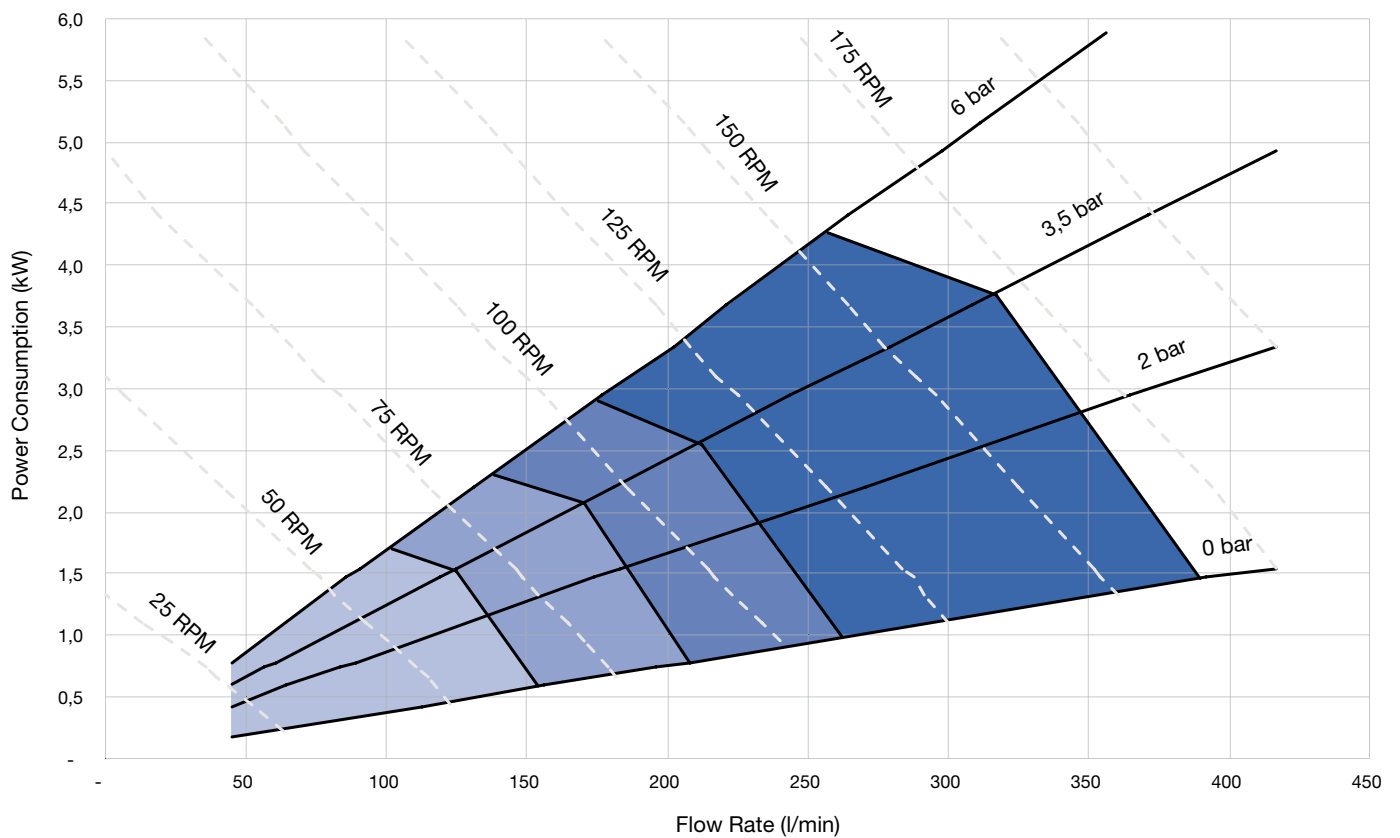

2.2 kW recommended
 3.0 kW recommended
 4.0 kW recommended
 5.5 kW recommended

080-VA-18_Datasheets_VA-EH50_EU



Danmark
 Lobe ApS
 Tlf. +45 7684 3484
 Mail: sales@lobe.dk
www.lobe.dk

Norge
 Lobe AS
 Tlf. +47 6710 5000
 Mail: sales@lobe.no
www.lobe.no

