



Description

The VA-EH25 is an electrical driven double diaphragm pump for food and cosmetic industrie. Having EC1935/2004 and FDA certification, this pump is the ideal problem solver in those industries. The VA-EH25 can run in “low pulsation mode” to reduce the generated pulsations in the flow or in “transfer mode” to generate a higher flow rate.

Your benefits

- EC1935/2004 and FDA certified
- Energy efficient
- Smoother flow when operating in “low pulsation mode”
- Low noise level
- Can stall against close discharge
- Can run dry without damage
- Dry self priming

Technical data	Drive options	Fluid & air section		
	AC	SA	62	
		SS	75	
Weight [kg]	Options			
	Cart		15	
	Compressor		13	
Max. Suction lift (mwc)		Dry	4,9	
		Wet	8,8	
Temperature (°C)	Internals			
		NW	4	90
		TO/TF	4	104
		SP	-40	82
	Drive option			
Electric Motor	AC	Power (kW)	1,5	
		Voltage (V)	3 x 230/460 - 50	
Max. Particle size (mm)			3,2	
Air connection			3/8" NPT(f)	
Air consumption (Nm³/h)			< 0,006	
Max. recommended viscosity (mPas)			10.000	



Code VA-EH25 No.1 No.2 No.3 No.4.No.5.No.6.No.7.

No.1 Fluid section

S = Stainless Steel 316, 3,2 µm

No.2 Center section

A = Aluminium

S = Stainless Steel 316

No.3 Check valve seats

SE = SS seat with EPDM o-rings

ST = SS seat with PTFE o-rings

No. 4 Check valve balls

NW = Neoprene Weighted

SP = Santoprene

TF = PTFE

No. 5 Diaphragms

SP = Santoprene

TF = PTFE/EPDM 2 piece

TO = PTFE/EPDM overmolded

No. 6 Connections

D4 = DIN 11851, DN40, male

T4 = Tri-clamp (ASME BPE), 1 1/2"


No. 7 Drive options

AC = 178 RPM, Gearbox with AC drive

EXAMPLE PUMP TYPE

VA-EH25 SS ST TF TO D4 AC

NOTE not all combinations are available

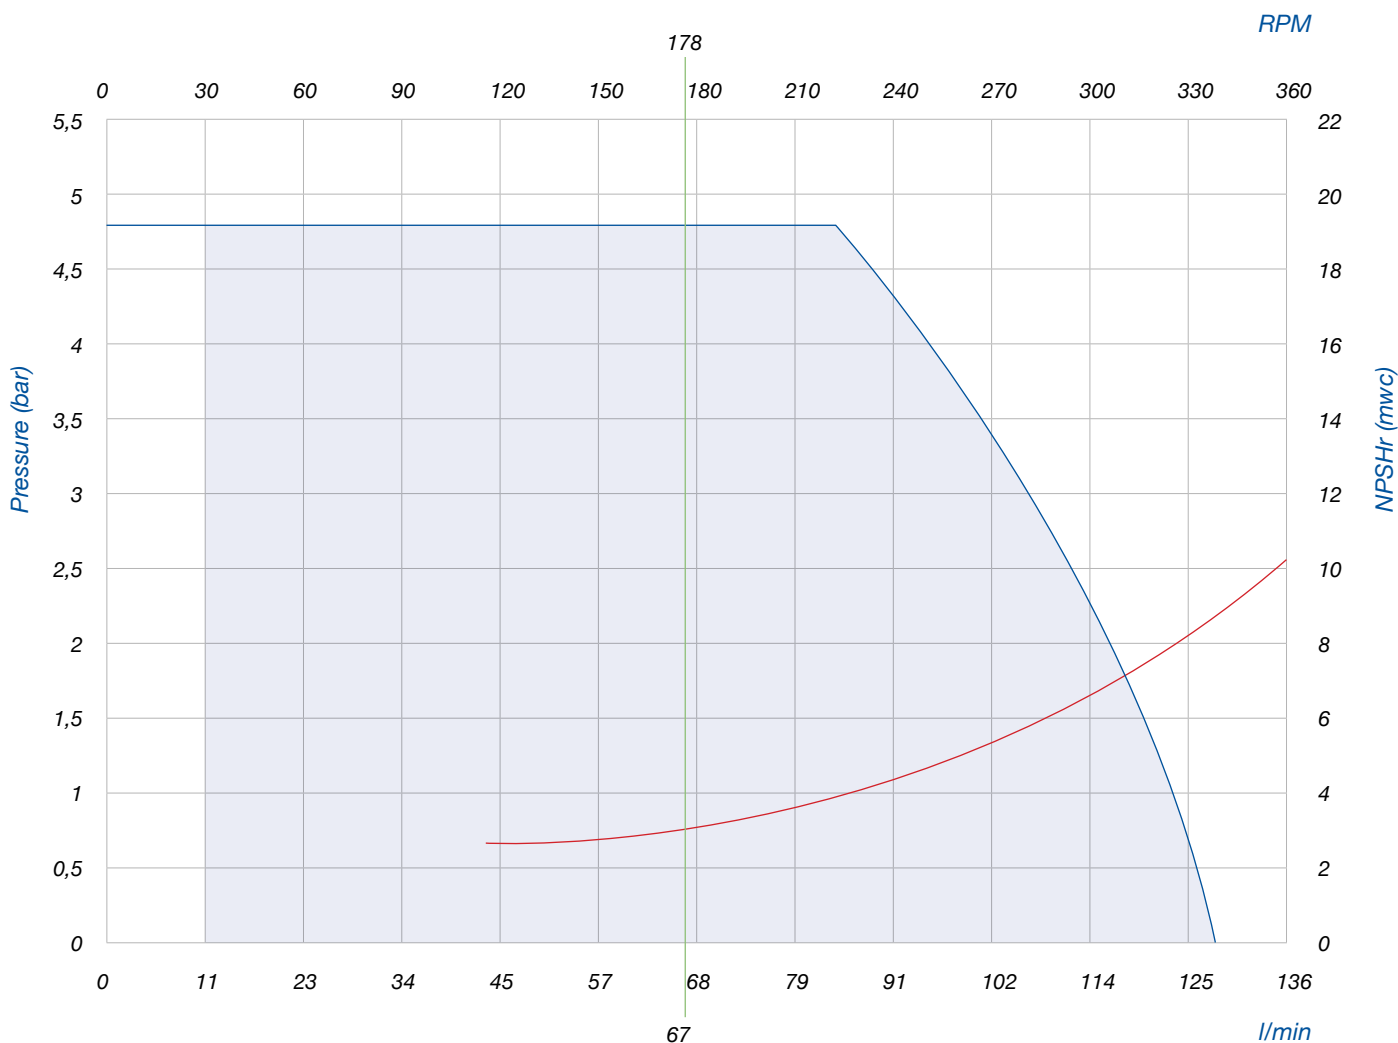

Dimensions (mm)

