


Verderhus Stainless Steel

HSB-150-100-A

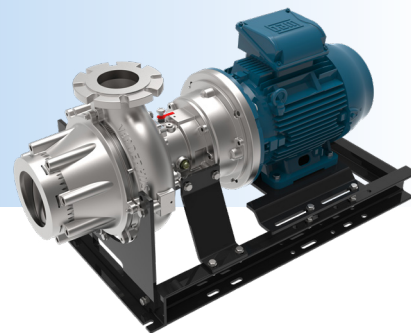

Description

Verderhus stainless steel screw centrifugal pumps combine the best features of centrifugal and positive displacement pumps. They define a new standard for low head, high flow pumps. The Verderhus pumps have a large clearance screw impeller, which gently feeds product into the pump chamber. This allows the product to be efficiently transferred into the discharge line and allows for large solids to be easily pumped. The screw design impeller is ideal for high solid contents and viscous liquids. It produces a high efficiency, low NPSHr pump, lowering both energy usage and operational costs, generating a lower overall cost of ownership.

Features and benefits

- Large solid handling with <10% sludge, <30% slurry
- Gentle, low shear pumping, meaning lesser damage to the fluid
- Low energy use compared to other technologies
- Low abrasive wear meaning reduced maintenance costs
- Corrosion resistant stainless steel for aggressive chemical handling


Technical data

| | | | |
|-------------------------------|-------------|--------------------------|---------------------------|
| Ambient operating temperature | -5, 40 °C | Max viscosity | 3000 cP |
| Fluid temperature | -20, 100 °C | Maximum solid size | 80 mm |
| Maximum pump noise | up to 75 dB | Solid content percentage | Sludge: 10% - Slurry: 30% |
| Max. flows | 300 m³/h | Max. head | 22 mwc |



Verderhus Stainless Steel





HSB-150-100-A

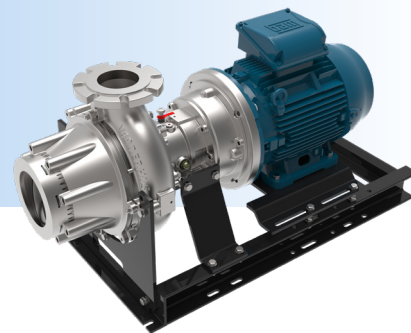

VERDERHUS®


Performance curve

| | |
|---------------|---------------------|
| Pump Type | 150-100 A |
| Speed | 1450 |
| Test Standard | ISO 9906 (class 2B) |

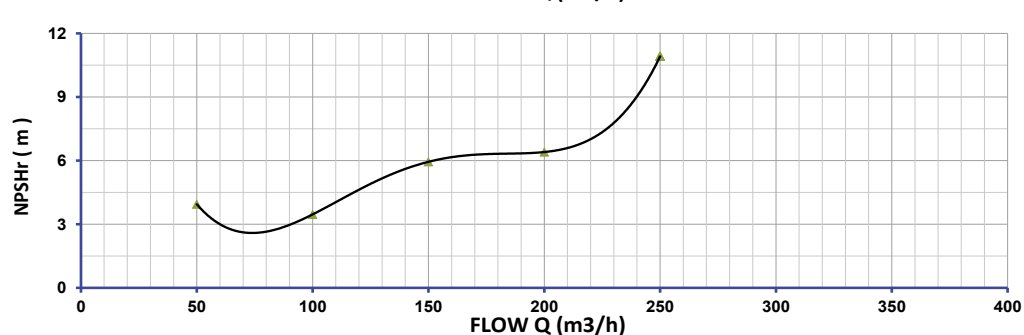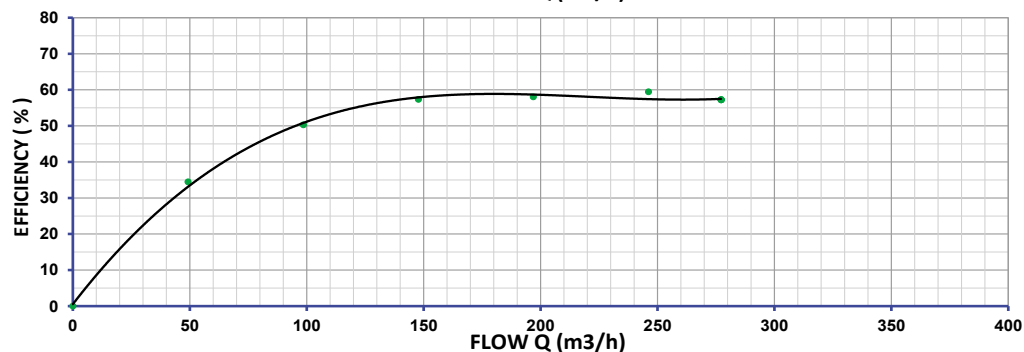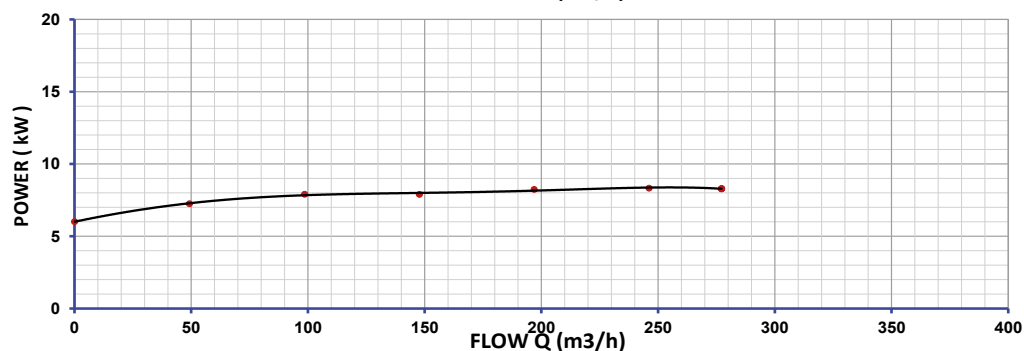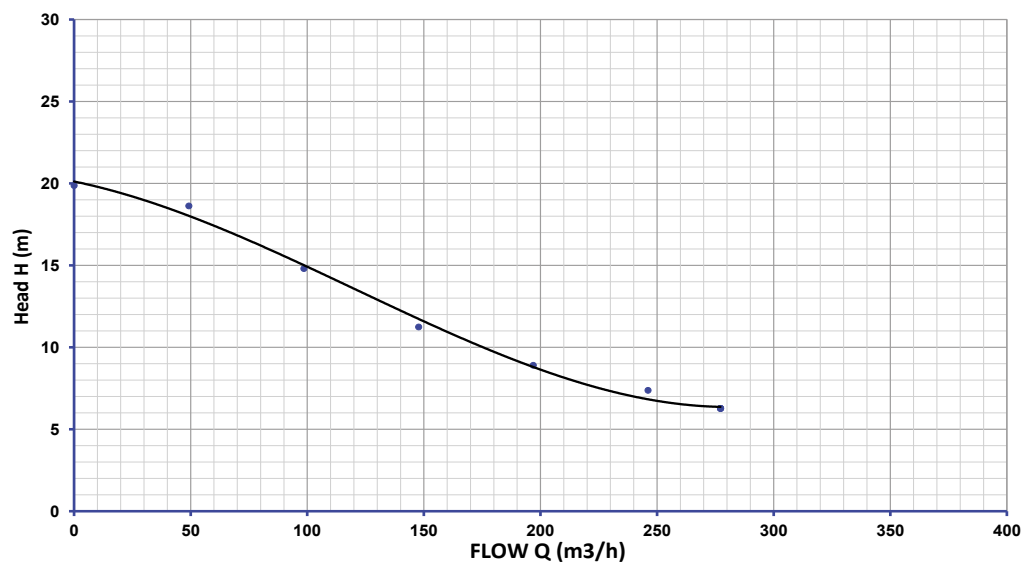

Verderhus Stainless Steel


HSB-150-100-A

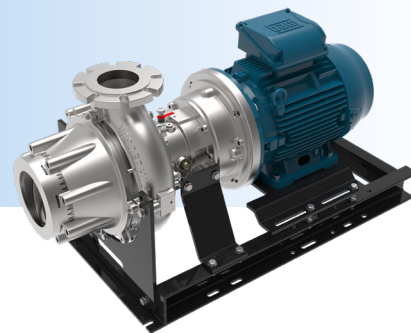

VERDERHUS®

| Item No. | Description | Standard Materials / Dimensions |
|----------|--|--|
| 1 | Impeller housing/Cone* | Stainless Steel 1.4408 (316) (Nitrided) |
| | Suction flange | DN150 PN10 |
| | Discharge flange | DN100 PN10 |
| 2 | Intake Socket* | Stainless Steel 1.4408 (316) (Nitrided) |
| 3 | Impeller* | Stainless Steel 1.4408 (316) (Nitrided) |
| 4 | Cooling Flange* | Stainless Steel 1.4408 (316) (Nitrided) |
| 5 | Bearing housing* | Stainless Steel 1.4408 (316) (Nitrided) |
| 6 | Transition flange | Stainless Steel 1.4408 (316) |
| 7 | Drive shaft | Stainless Steel 1.4435 (AISI 316L) |
| 8 | Bearing | Single Row Deep Groove Ball Race-Sealed for Life |
| 9 | Mechanical seal-product side | Silicon Carbide/Silicon Carbide/VITON |
| 10 | Mechanical seal-motor side | Carbon/Ceramic/NBR |
| 11 | Oil Chamber | Industrial gear oil 150 |
| 12 | O-rings material | FPM |
| 13 | Motor options and overall pump weight (WEG W22 IE3 motors) | With IEC132 Motor: 248 Kg With IEC160 Motor: 387 Kg |
| | Mounting frame | Steel S275 JR |


* Impeller housing, Intake socket, Impellers, Bearing housing and Cooling flange will now be Nitrided as standard to increase wear resistance and surface hardness.

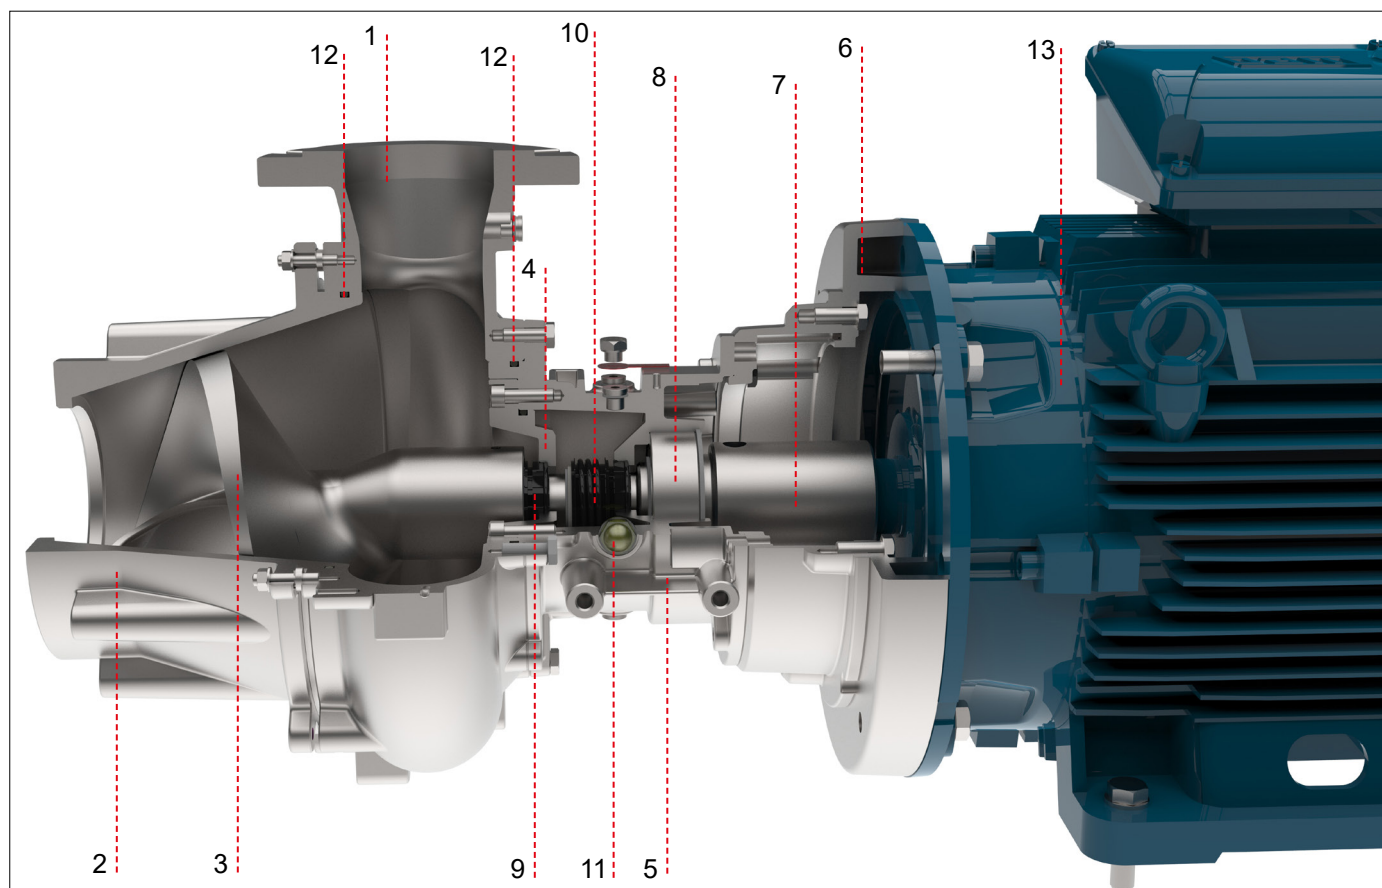

Sectional view of Impeller Housing Assembly


Verderhus Stainless Steel

HSB-150-100-A

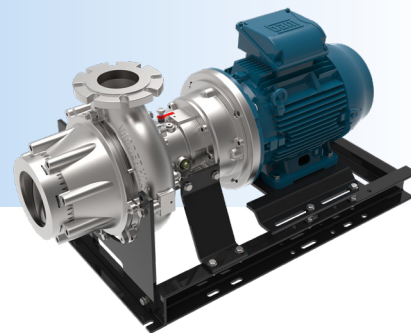

VERDERHUS®

Dimensions

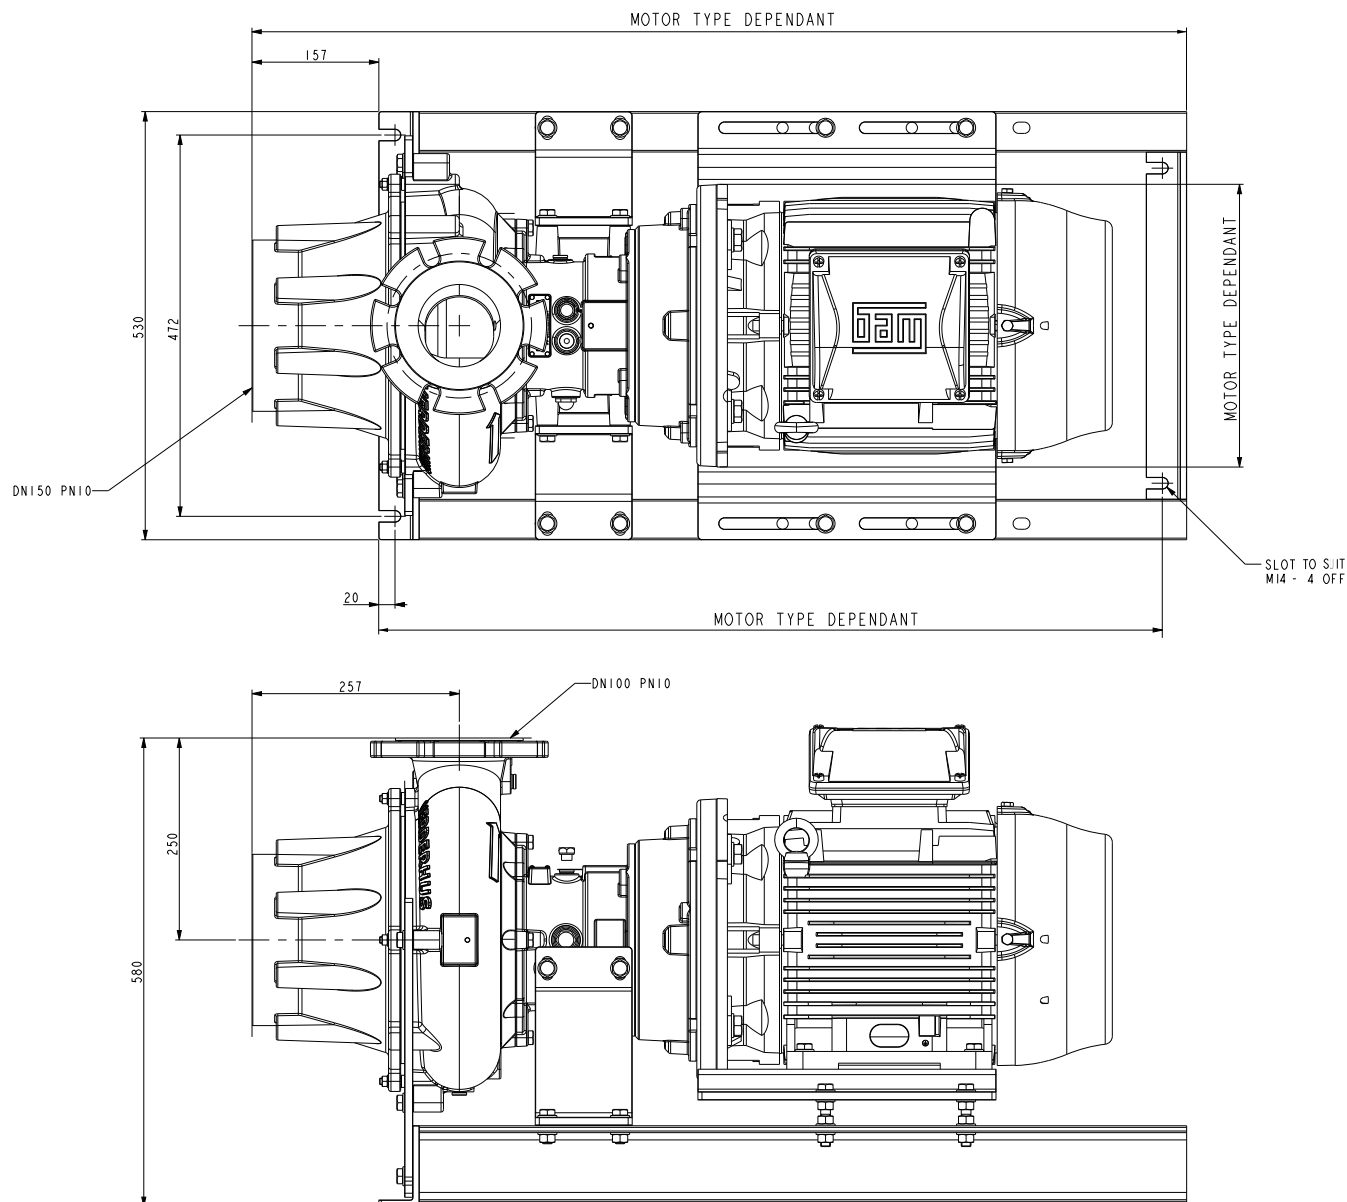


All dimensions are in mm.

All dimensions and weights are for guidance only.

Find your local supplier at www.verderhus.com


For construction, installation and floor mounting drawings
please contact your local authorised Verderhus® distributor.

VERDER
passion for pumps



Verderhus Stainless Steel

HSB-150-100-B

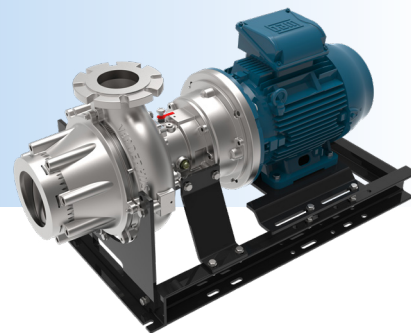

Description


Verderhus stainless steel screw centrifugal pumps combine the best features of centrifugal and positive displacement pumps. They define a new standard for low head, high flow pumps. The Verderhus pumps have a large clearance screw impeller, which gently feeds product into the pump chamber. This allows the product to be efficiently transferred into the discharge line and allows for large solids to be easily pumped. The screw design impeller is ideal for high solid contents and viscous liquids. It produces a high efficiency, low NPSHr pump, lowering both energy usage and operational costs, generating a lower overall cost of ownership.

Features and benefits

- Large solid handling with <10% sludge, <30% slurry
- Gentle, low shear pumping, meaning lesser damage to the fluid
- Low energy use compared to other technologies
- Low abrasive wear meaning reduced maintenance costs
- Corrosion resistant stainless steel for aggressive chemical handling


Technical data

| | | | |
|-------------------------------|-------------|--------------------------|---------------------------|
| Ambient operating temperature | -5, 40 °C | Max viscosity | 3000 cP |
| Fluid temperature | -20, 100 °C | Maximum solid size | 80 mm |
| Maximum pump noise | up to 75 dB | Solid content percentage | Sludge: 10% - Slurry: 30% |
| Max. flows | 360 m³/h | Max. head | 23 mwc |

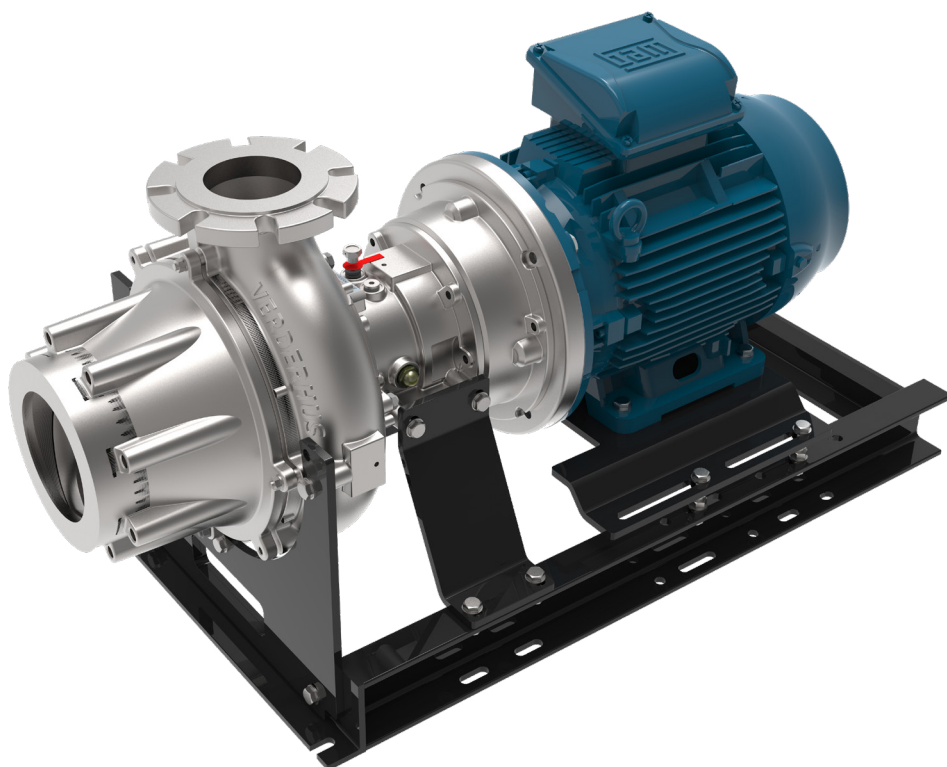

Verderhus Stainless Steel





HSB-150-100-B

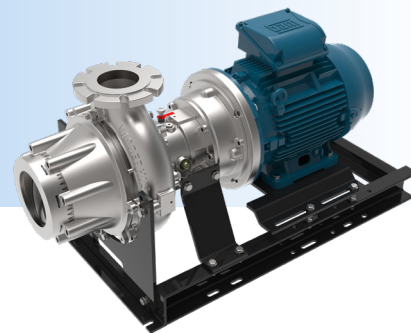

VERDERHUS®


Performance curve

| | |
|---------------|---------------------|
| Pump Type | 150-100 B |
| Speed | 1450 |
| Test Standard | ISO 9906 (class 2B) |

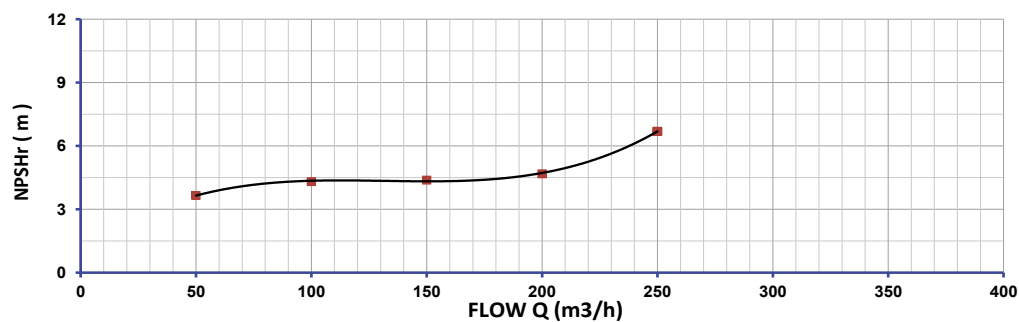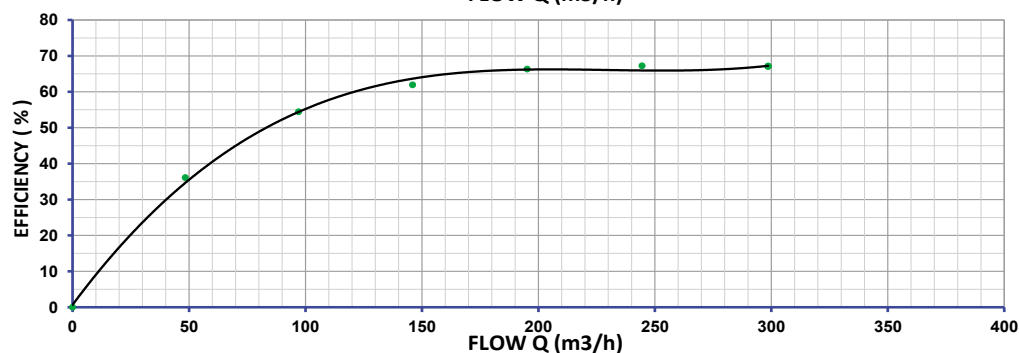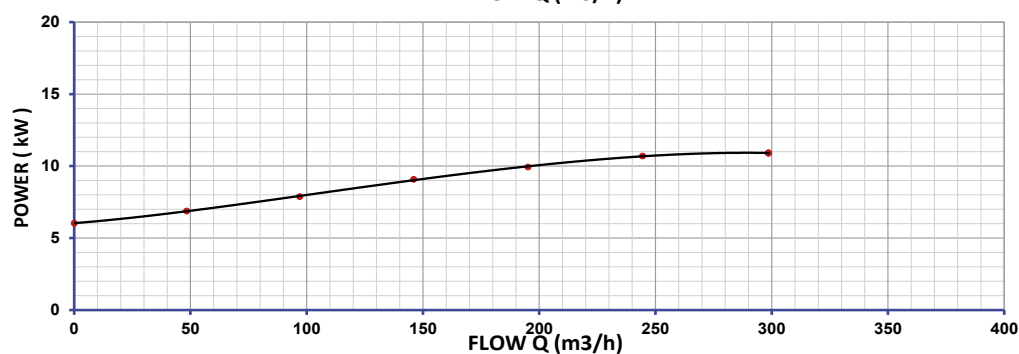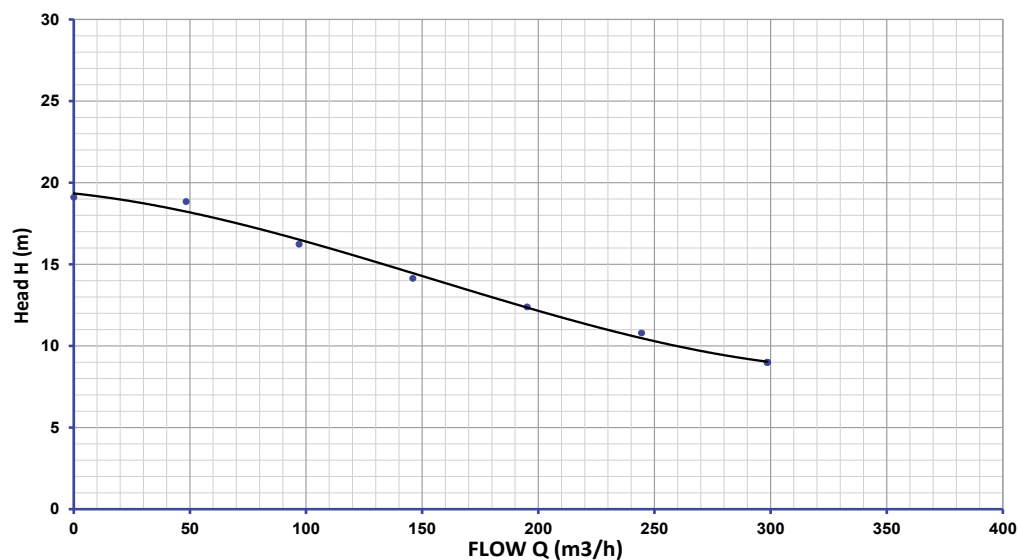

Verderhus Stainless Steel


HSB-150-100-B

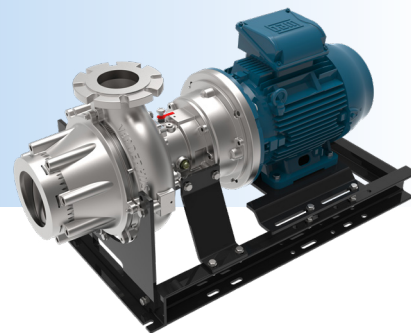

VERDERHUS®

| Item No. | Description | Standard Materials / Dimensions |
|----------|--|---|
| 1 | Impeller housing/Cone* | Stainless Steel 1.4408 (316) (Nitrided) |
| | Suction flange | DN150 PN10 |
| | Discharge flange | DN100 PN10 |
| 2 | Intake Socket* | Stainless Steel 1.4408 (316) (Nitrided) |
| 3 | Impeller* | Stainless Steel 1.4408 (316) (Nitrided) |
| 4 | Cooling Flange* | Stainless Steel 1.4408 (316) (Nitrided) |
| 5 | Bearing housing* | Stainless Steel 1.4408 (316) (Nitrided) |
| 6 | Transition flange | Stainless Steel 1.4408 (316) |
| 7 | Drive shaft | Stainless Steel 1.4435 (AISI 316L) |
| 8 | Bearing | Single Row Deep Groove Ball Race-Sealed for Life |
| 9 | Mechanical seal-product side | Silicon Carbide/Silicon Carbide/VITON |
| 10 | Mechanical seal-motor side | Carbon/Ceramic/NBR |
| 11 | Oil Chamber | Industrial gear oil 150 |
| 12 | O-rings material | FPM |
| 13 | Motor options and overall pump weight (WEG W22 IE3 motors) | With IEC132 Motor: 248 Kg With IEC160 Motor: 387 Kg With IEC180 Motor: 450 Kg |
| | Mounting frame | Steel S275 JR |


* Impeller housing, Intake socket, Impellers, Bearing housing and Cooling flange will now be Nitrided as standard to increase wear resistance and surface hardness.

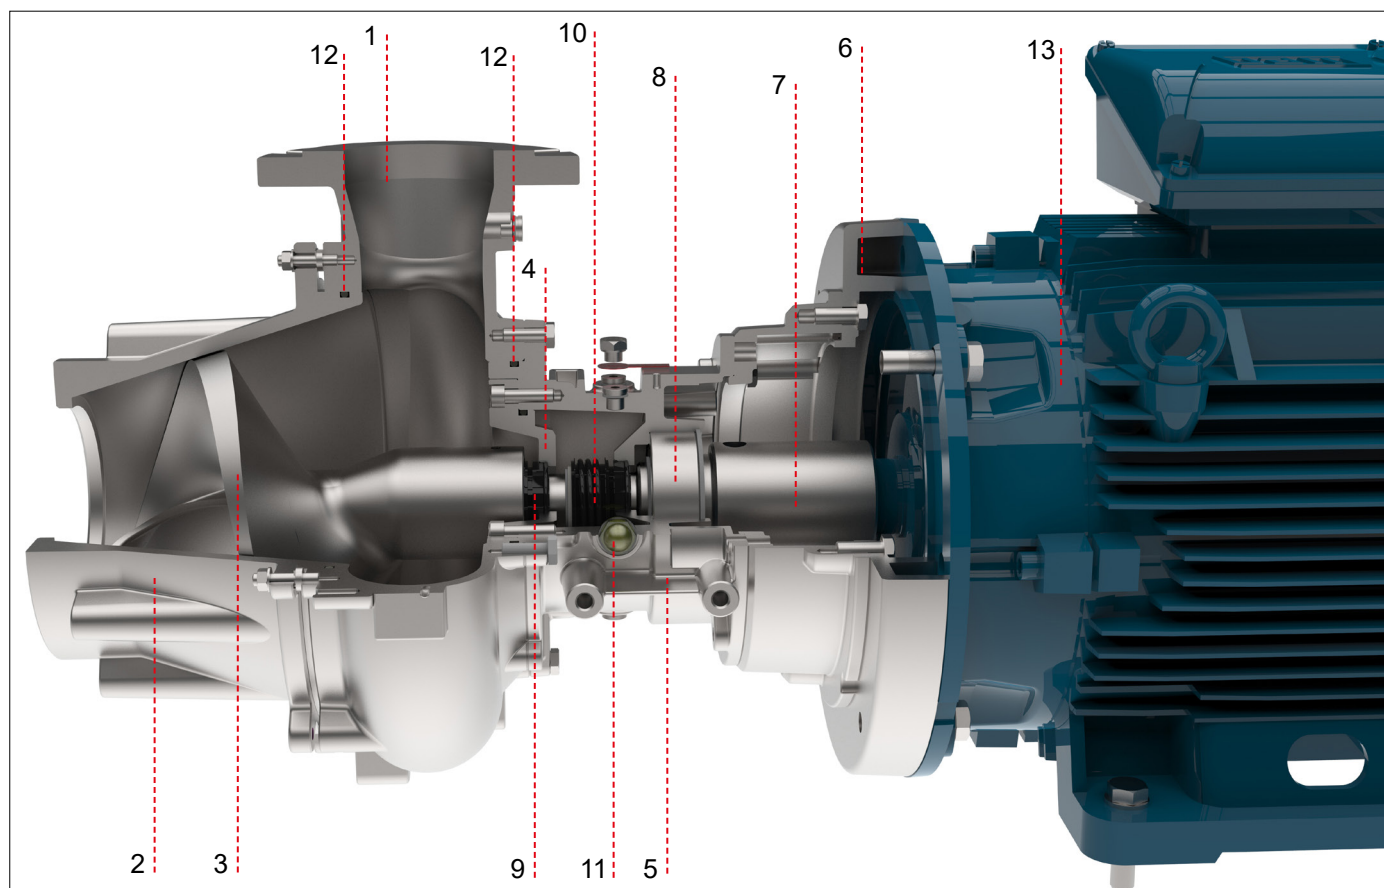


Sectional view of Impeller Housing Assembly

Verderhus Stainless Steel

HSB-150-100-B

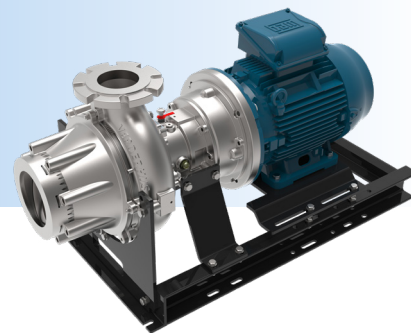

Dimensions

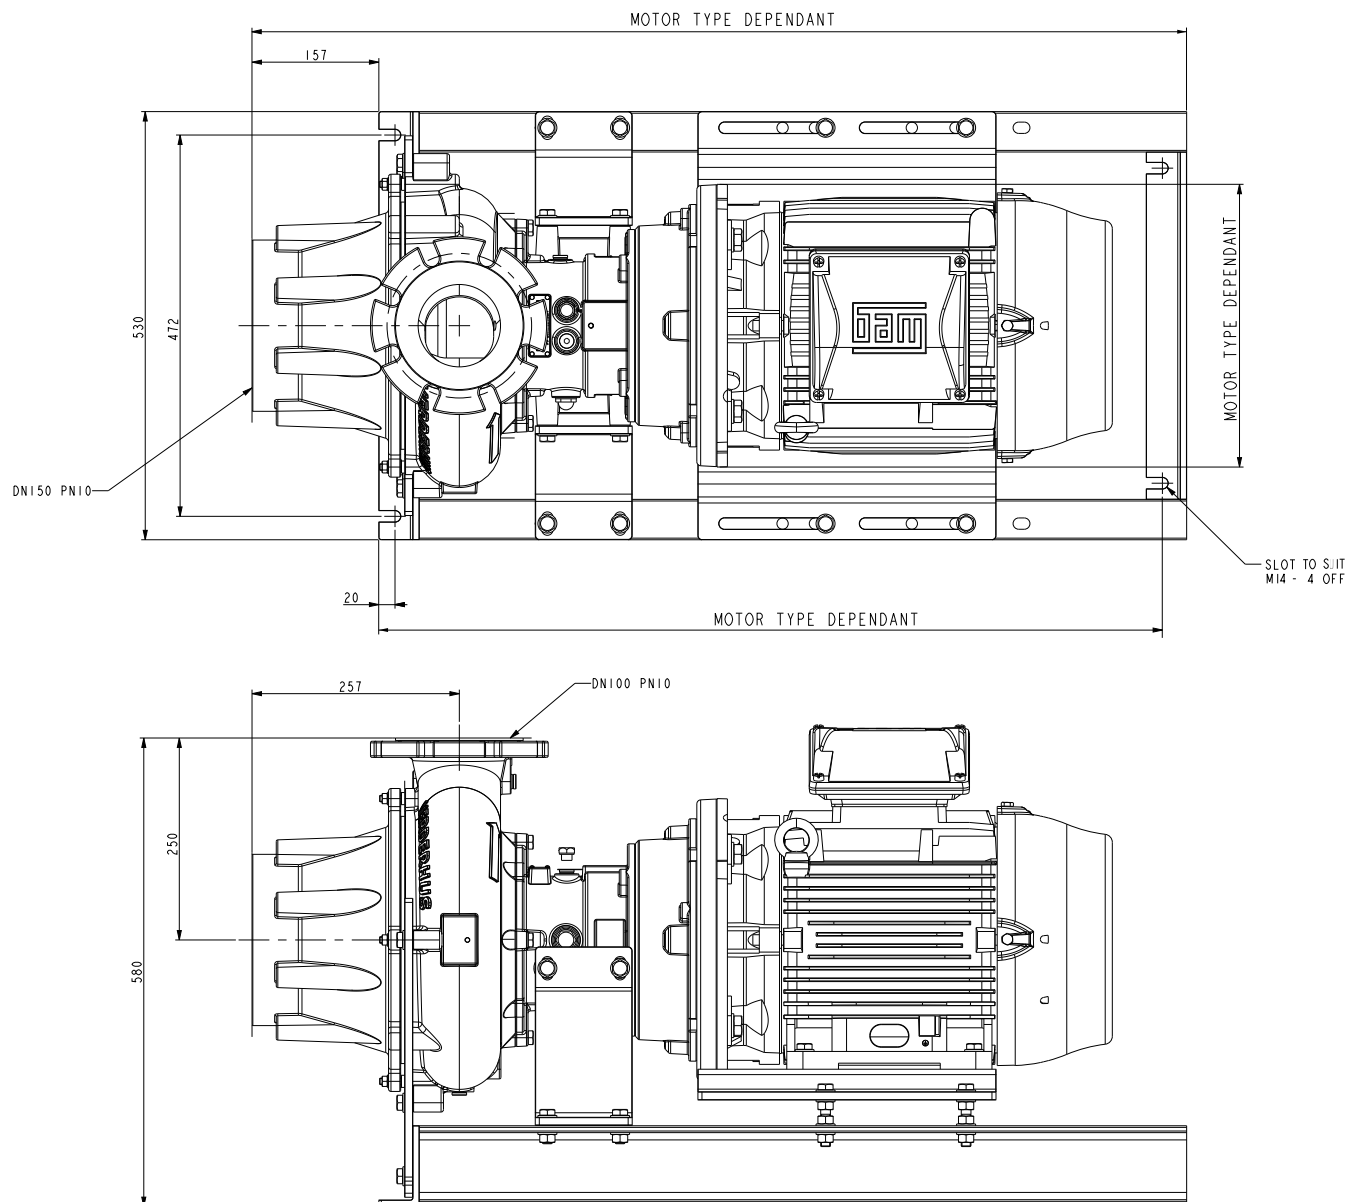

All dimensions are in mm.


All dimensions and weights are for guidance only.

Find your local supplier at www.verderhus.com

For construction, installation and floor mounting drawings please contact your local authorised Verderhus® distributor.


VERDER
passion for pumps

VERDERHUS®



Verderhus Stainless Steel

HSB-150-100-C

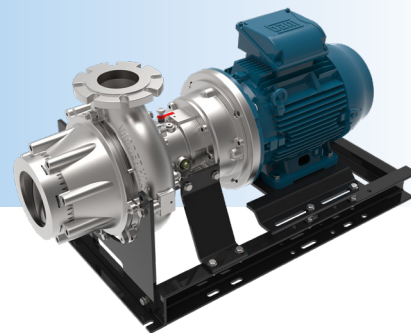

Description

Verderhus stainless steel screw centrifugal pumps combine the best features of centrifugal and positive displacement pumps. They define a new standard for low head, high flow pumps. The Verderhus pumps have a large clearance screw impeller, which gently feeds product into the pump chamber. This allows the product to be efficiently transferred into the discharge line and allows for large solids to be easily pumped. The screw design impeller is ideal for high solid contents and viscous liquids. It produces a high efficiency, low NPSHr pump, lowering both energy usage and operational costs, generating a lower overall cost of ownership.

Features and benefits

- Large solid handling with <10% sludge, <30% slurry
- Gentle, low shear pumping, meaning lesser damage to the fluid
- Low energy use compared to other technologies
- Low abrasive wear meaning reduced maintenance costs
- Corrosion resistant stainless steel for aggressive chemical handling


Technical data

| | | | |
|-------------------------------|-------------|--------------------------|---------------------------|
| Ambient operating temperature | -5, 40 °C | Max viscosity | 3000 cP |
| Fluid temperature | -20, 100 °C | Maximum solid size | 80 mm |
| Maximum pump noise | up to 75 dB | Solid content percentage | Sludge: 10% - Slurry: 30% |
| Max. flows | 360 m³/h | Max. head | 24 mwc |



Verderhus Stainless Steel





HSB-150-100-C

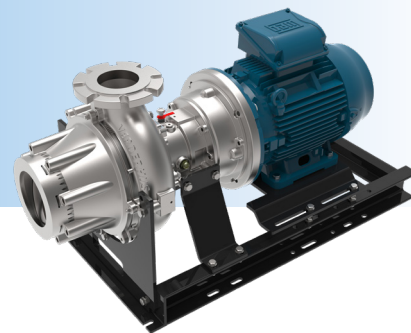

VERDERHUS®


Performance curve

| | |
|---------------|---------------------|
| Pump Type | 150-100 C |
| Speed | 1450 |
| Test Standard | ISO 9906 (class 2B) |

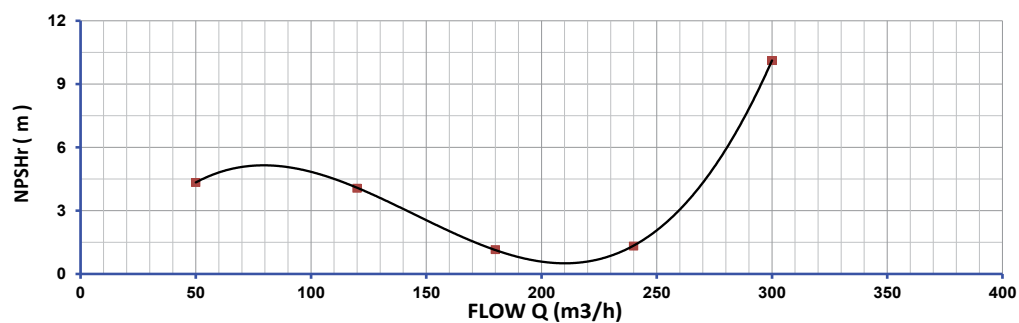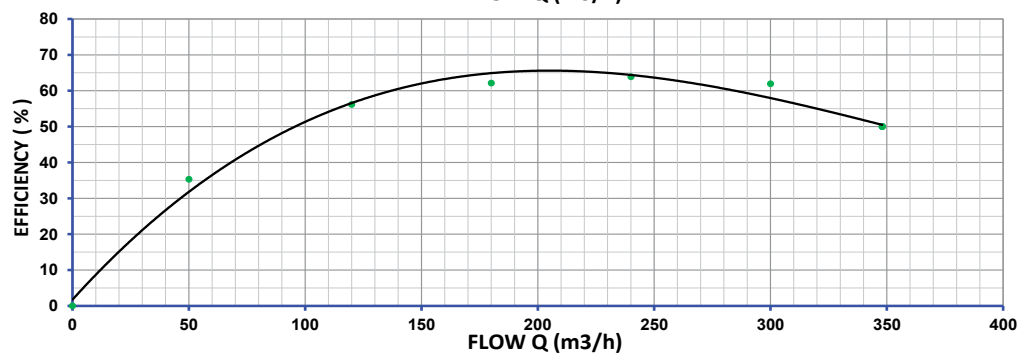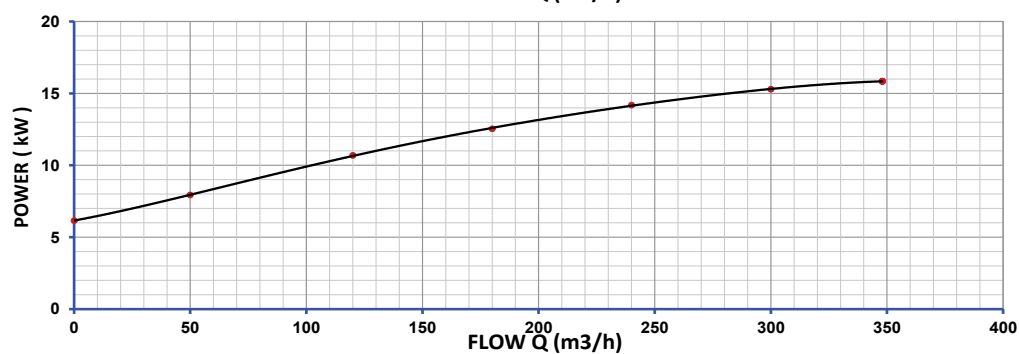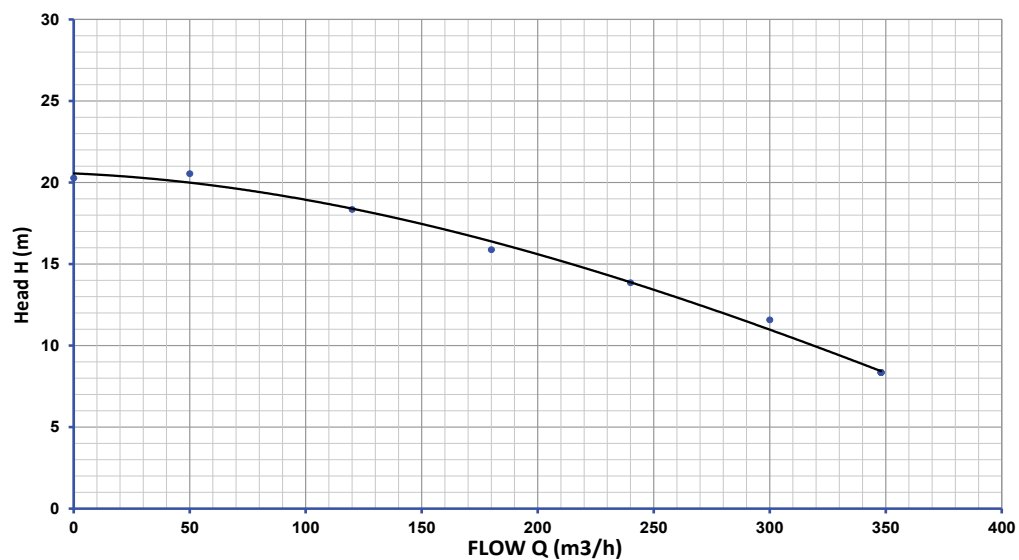

Verderhus Stainless Steel


HSB-150-100-C

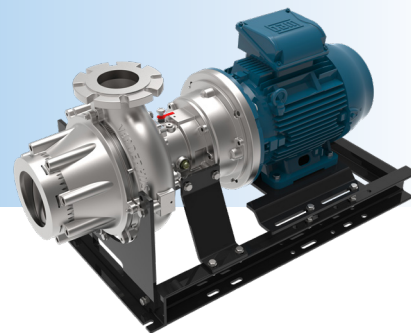

VERDERHUS®

| Item No. | Description | Standard Materials / Dimensions |
|----------|--|--|
| 1 | Impeller housing/Cone* | Stainless Steel 1.4408 (316) (Nitrided) |
| | Suction flange | DN150 PN10 |
| | Discharge flange | DN100 PN10 |
| 2 | Intake Socket* | Stainless Steel 1.4408 (316) (Nitrided) |
| 3 | Impeller* | Stainless Steel 1.4408 (316) (Nitrided) |
| 4 | Cooling Flange* | Stainless Steel 1.4408 (316) (Nitrided) |
| 5 | Bearing housing* | Stainless Steel 1.4408 (316) (Nitrided) |
| 6 | Transition flange | Stainless Steel 1.4408 (316) |
| 7 | Drive shaft | Stainless Steel 1.4435 (AISI 316L) |
| 8 | Bearing | Single Row Deep Groove Ball Race-Sealed for Life |
| 9 | Mechanical seal-product side | Silicon Carbide/Silicon Carbide/VITON |
| 10 | Mechanical seal-motor side | Carbon/Ceramic/NBR |
| 11 | Oil Chamber | Industrial gear oil 150 |
| 12 | O-rings material | FPM |
| 13 | Motor options and overall pump weight (WEG W22 IE3 motors) | With IEC132 Motor: 248 Kg With IEC160 Motor: 387 Kg |
| | Mounting frame | Steel S275 JR |

* Impeller housing, Intake socket, Impellers, Bearing housing and Cooling flange will now be Nitrided as standard to increase wear resistance and surface hardness.

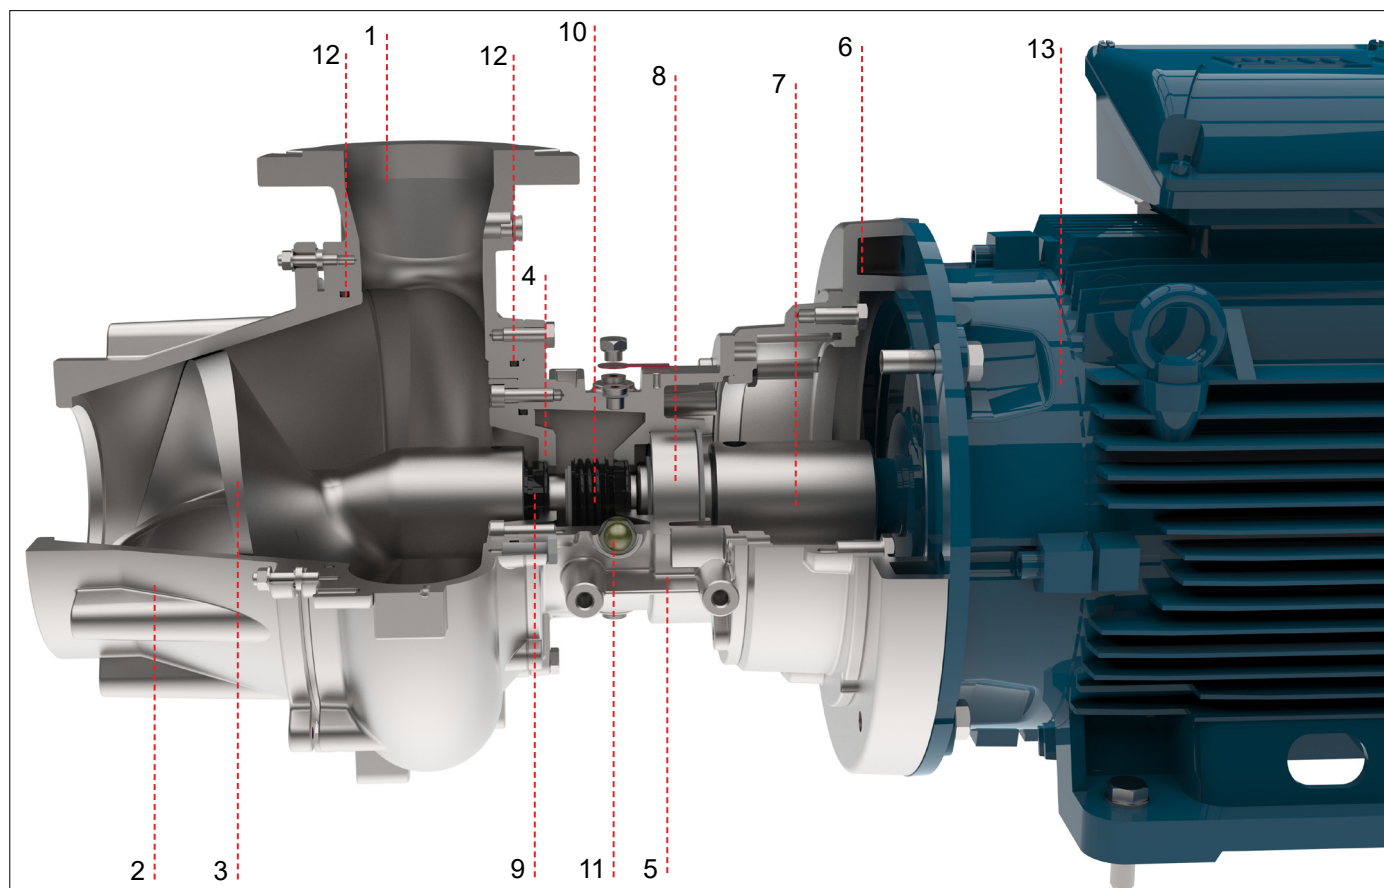


Sectional view of Impeller Housing Assembly




Verderhus Stainless Steel

HSB-150-100-C

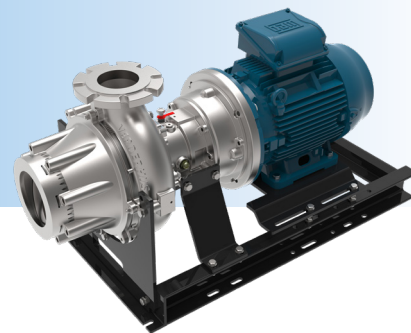


Dimensions

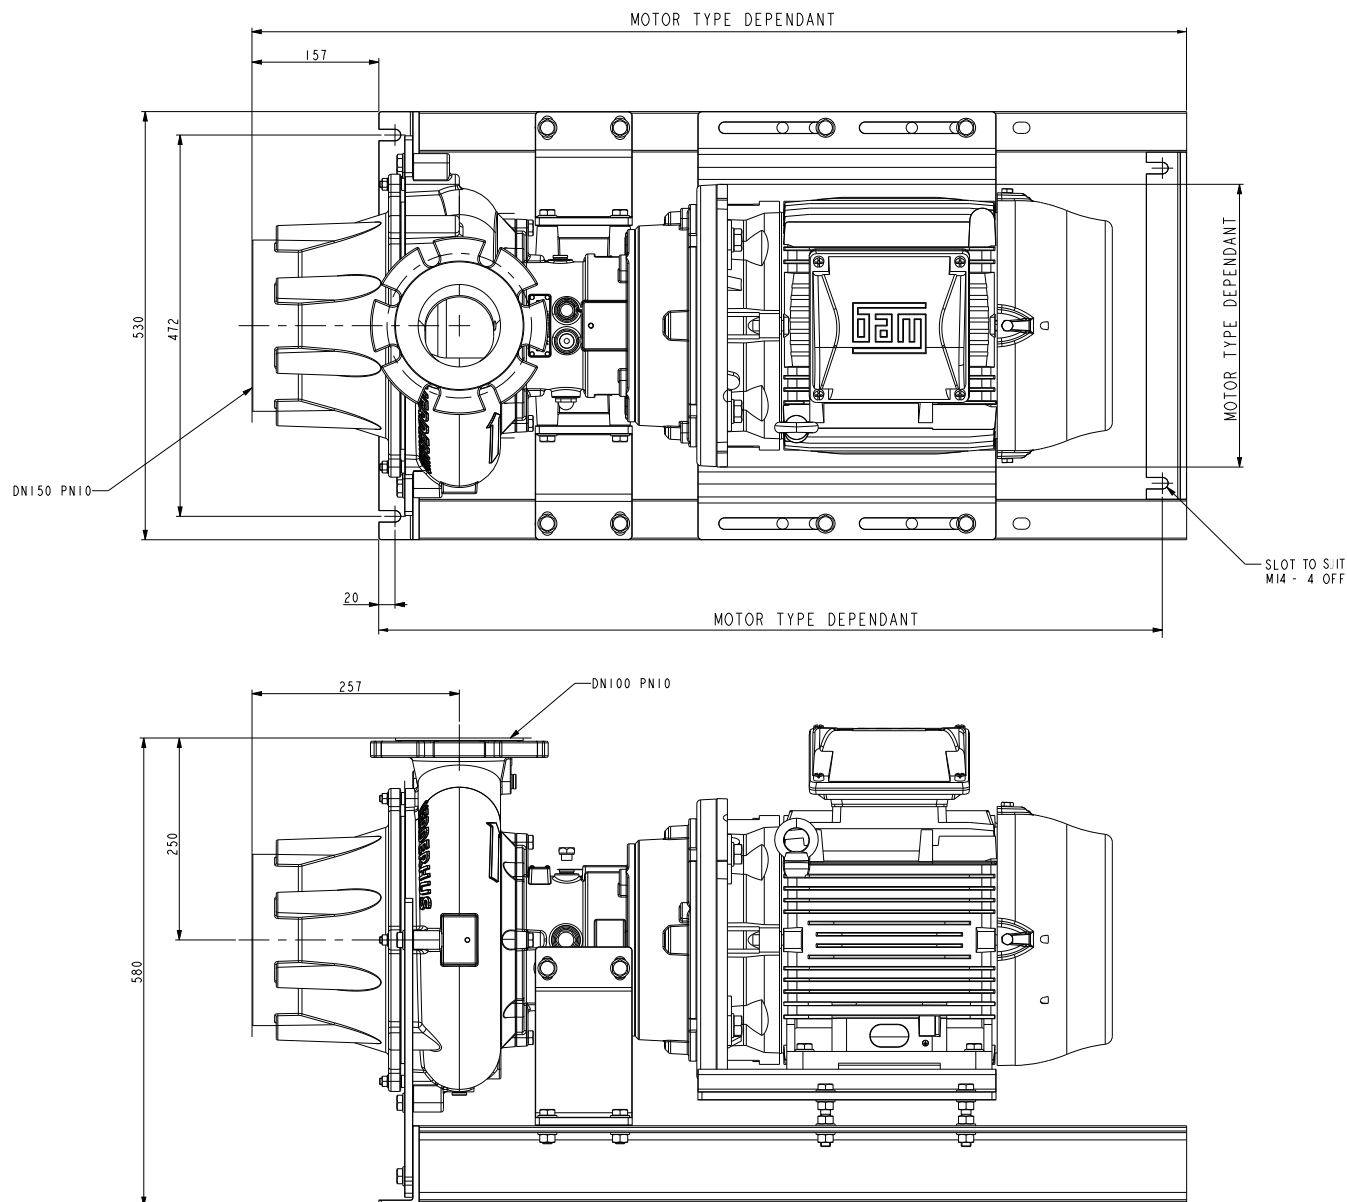

All dimensions are in mm.

All dimensions and weights are for guidance only.

136-VH-SS_HSB_150_100_C_Technosheet_rev02_2020_(eu)



lobe

Danmark
Lobe ApS
Tlf. +45 7684 3484
Mail: sales@lobe.dk
www.lobe.dk

Norge
Lobe AS
Tlf. +47 6710 5000
Mail: sales@lobe.no
www.lobe.no

VERDER
passion for pumps

VERDERHUS